

Technical Specification of TPO-H-15


Tianda TPO is a leading player in the field of polymer waterproofing membranes, domestically and globally. As a specialized manufacturer of TPO waterproofing membranes, we cater to the rising demand for building insulation in roof waterproofing while ensuring leak prevention and extended durability.

Our company stands out as a new-age enterprise, integrating research, development, production, sales, and technical services, with a focus on polymer waterproofing materials. Our flagship products include thermoplastic polyolefin (TPO) waterproofing membranes, PVC waterproofing membranes, HDPE waterproofing membranes, and high elastic waterproofing membranes. Committed to uniform quality standards, our products hold multiple certifications, underscoring our dedication to building a new era of energy-efficient and eco-friendly waterproofing solutions.

With over 14 years of pioneering experience in steel structure roofs, our products have been extensively used in green waterproofing projects across automotive factory buildings, industrial facilities, civil structures, public buildings, garage roofs, civil defense engineering, subway stations, comprehensive pipe galleries, and more.

Our TPO waterproofing materials meet the stringent requirements of sustainable building materials and energy efficiency regulations, both domestically and internationally. Tianda specializes in adapting globally proven waterproofing and insulation systems to local needs, thereby enhancing construction quality and efficiency across all roof waterproofing endeavors.

PRODUCT DESCRIPTION

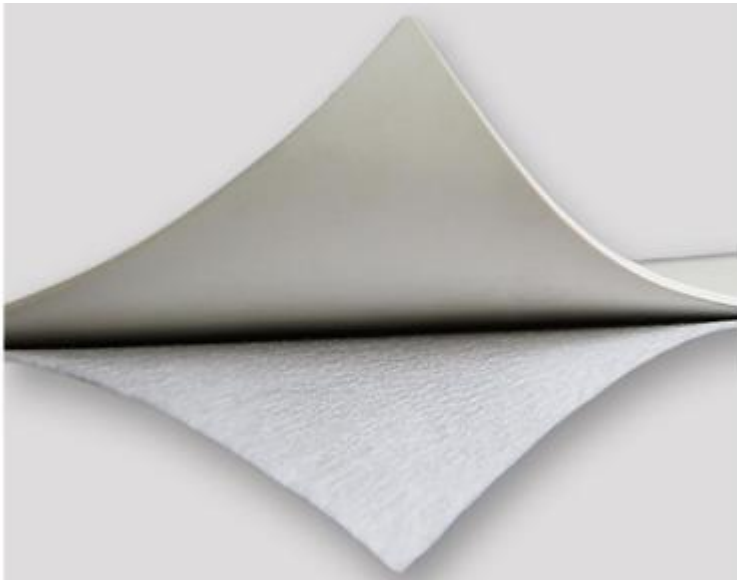

The TPO (Thermoplastic Polyolefin) membrane is a rapidly expanding roofing system globally. Its consistent superiority over other materials lies in its simplicity of installation, durability, top-notch performance, competitive pricing, and environmental friendliness. Furthermore, it stands alone as the only system that offers simultaneous protection from water and heat, making it a preferred choice in roofing solutions.

APPLICATION AREAS



A: Roofing waterproofing membrane –suitable for low slope applications (new construction or renovation)

- Factory shed (prefabricated building) metal roof
- Metro station
- Airport
- TRAIN STATION
- Bus station
- Shopping mall
- Hospital
- Bus station
- Schools and colleges
- Resorts and sanatoriums with pitched roofs

B: Green roof and podium

- Apartment podium floor
- balcony
- open terrace
- roof garden
- sloping roof

C: Building underground waterproofing system

Tianda Waterproof Building Materials Co., Ltd

In the Tianda Waterproof Industrial Park at the northeast corner of the intersection of Jingshisan Road and S308 Provincial Road in the Economic Development Zone of Xinxiang City, Henan Province, China

Tel & WhatsApp: +8618337315757

Email: jleo0301@outlook.com

<http://tdwaterproof.com/>


- Basement, ground floor, underground garage, tunnel gallery

PRODUCT FEATURES

- Environmentally friendly, chlorine-free and pollution-free.
- Excellent aging resistance.
- High breaking strength, high tear strength, impact resistance and puncture resistance. Excellent wind resistance.
- Resistant to low temperature, no cracks when bent at -40°C.
- Smooth surface, high reflectivity, energy-saving and pollution-resistant.
- Hot air welding is safe, reliable, strong and durable.
- Resistant to the growth of algae, mold and other microorganisms, and resistant to heat aging.
- Strong acid and alkali corrosion resistance, suitable for areas with high acid and alkali. No open flame construction, high safety.

SPECIFICATION

- Nominal length: 20 m.
- Nominal width: 2.0 m.
- Thickness: 1.5 mm
- Weight: ±62 kg

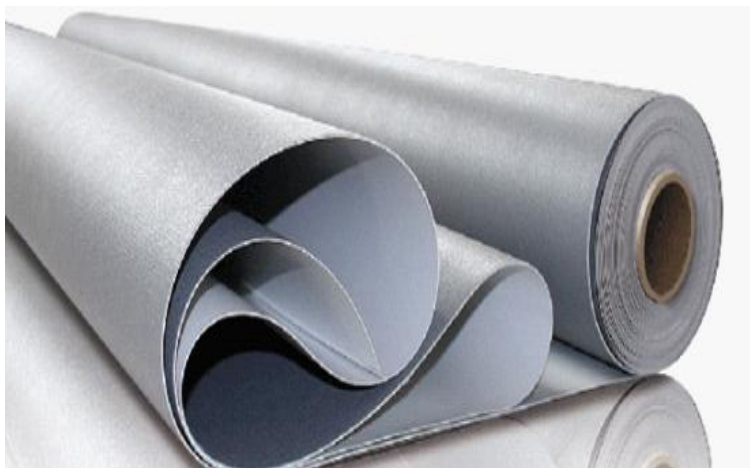



天达防水

HEXAHEDRON

LEFILER®

新乡滤器 837936.OC

新乡市利菲尔特滤器股份有限公司
Xinxiang Lefilter Filter Corp., LTD

DATABASE

产品名称: Product Name:	高分子复合防水卷材 TPO waterproof membrane		规格型号 Model	1.5mm L (2*20m)
序号 Serial number	检测项目 Test items		标准要求 Standard Specification	检测结果 Test Data
1	拉伸性能 TENSILE PROPERTY	最大拉力 Maximum pulling force	纵向Vertical ≥200N/cm	245 N/cm
			横向Horizontal ≥200N/cm	272 N/cm
		拉伸伸长率 Elongati on at Break	纵向Vertical ≥250%	376%
			横向Horizontal ≥250%	407%
2	热处理尺寸 变化率	纵向Vertical	≤1.0%	0.20%
		横向Horizontal	≤1.0%	0.30%
3	低温弯折性 Low temperature bending property		零下40° C无裂纹 No cracks at minus 40 ° C	零下40° C无裂纹 No cracks at minus 40 ° C
4	不透水性Water Absorption		0.3MPa, 2h 不透水 0.3MPa, 2-hour impermeable	0.3MPa, 2h 不透水 0.3MPa, 2-hour impermeable
5	接缝剥离强度Joint peel strength		≥3.0N/mm or 卷材被破坏 ≥ 3.0N/mm or the coil is damaged	10.3 N/mm

Tianda Waterproof Building Materials Co., Ltd

In the Tianda Waterproof Industrial Park at the northeast corner of the intersection of Jingshisan Road and S308 Provincial Road in the Economic Development Zone of Xinxiang City, Henan Province, China

Tel & WhatsApp: +8618337315757

Email: jleo0301@outlook.com

<http://tdwaterproof.com/>